

CHARACTER:

1.Physical performance

- a、 Good mechanical properties
- b、 Good resistance to high temperature, low temperature resistance
- c、 Good flame retardancy
- d、 Good corrosion resistance
- e、 Good resistance to climate
- f、 Good lubricity (small friction coefficient)

2.Electrical Properties

- a、 Electrical insulation good
- b、 Has the very high resistivity
- c、 Low dielectric constant 2.1

3.Processing properties

- a、 Use half extrusion processing
- b、 Good wire processing performance
- c、 In the process of wire processing good compatibility
- d、 According to UL standard design

4.Environmental protection

- a、 ROHS/REACH compliant
- b、 nonhazardous


SHOULD BE USED:

Internal Wiring of Appliances.

REFERENCE:

UL758-2010、UL1581-2009

Outline:

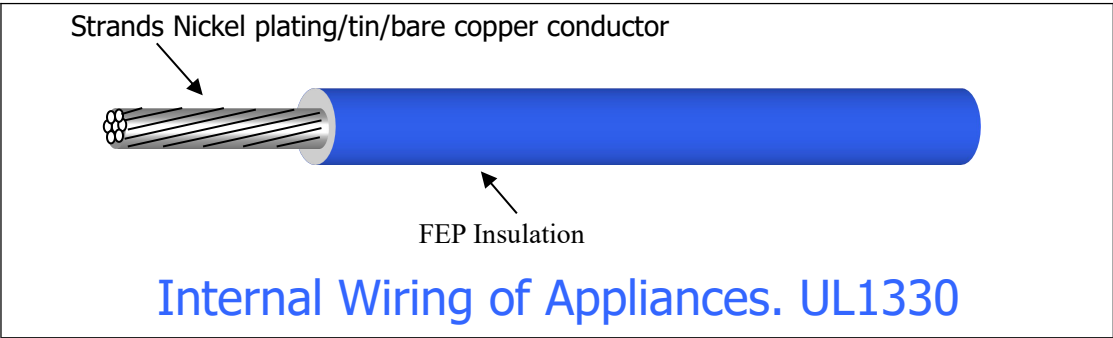

Wire structure description:
Conductor: Nickel plating/tin/bare copper conductor;
Insulation materials: FEP Insulation

Conductor temperature not over 200℃ FEP insulated wire								
Rated temperature: 200℃ rated voltage: 600V								
STYLE	standard AWG	Conductor size (No./ mm) ±0.005mm	Conductor resistance 20℃ (Ω/Km)	Conductor Dia.(mm)	insulation thickness (mm)		Overall diameter (mm)	
					Nom.	Min.	Mon.	Tol.
1330	10	37/0.42	3.54	2.94	0.51	0.45	3.96	±0.15
	10	105/0.254	3.54	3.00	0.51	0.45	4.02	±0.15
	12	37/0.374	5.64	2.62	0.51	0.45	3.64	±0.15
	14	19/0.361	8.96	1.85	0.51	0.45	2.90	±0.10
	16	19/0.287	14.60	1.50	0.51	0.45	2.50	±0.10
	18	1/1.02	22.2	1.02	0.51	0.45	2.04	±0.10
	18	19/0.254	23.20	1.28	0.51	0.45	2.30	±0.10
	18	19/0.235	23.20	1.18	0.51	0.45	2.20	±0.10
	20	19/0.19	36.70	0.95	0.51	0.45	1.95	±0.10
	20	7/0.30	36.70	0.92	0.51	0.45	1.94	±0.10
	20	1/0.813	35.2	0.813	0.51	0.45	1.83	±0.10
	22	19/0.15	59.40	0.76	0.51	0.45	1.75	±0.10
	24	19/0.12	59.40	0.60	0.51	0.45	1.62	±0.10
	24	7/0.20	94.20	0.61	0.51	0.45	1.60	±0.10
	24	1/0.51	89.3	0.51	0.51	0.45	1.53	±0.10
	26	7/0.16	150.00	0.48	0.51	0.45	1.50	±0.10
	28	1/0.32	227.00	0.32	0.51	0.45	1.32	±0.10
	30	1/0.254	361.00	0.254	0.51	0.45	1.26	±0.10

Marking: E211048 AWM STYLE 1330 NO. AWG 200℃ 600V VW-1 FEP QIFURUI
C AWM I A 200℃ 600V FT1 -LF-

SAE COLOR SERIES

* STOCK COLOR CHART				
00-BLACK	01-WHITE	02-RED	03-YELLOW	04-GREEN
05-BLUE	06-BROWN	07-GREY	08-ORANGE	09- VIOLET

PACKAGE

*PACKAGE				
Part No.	Packing- FT/roll			
10AWG	☒ 500Ft	☐ 1000Ft	☐ 2000Ft	
12~20AWG	☐ 500Ft	☒ 1000Ft	☐ 2000Ft	
22-30AWG	☐ 500Ft	☐ 1000Ft	☒ 2000Ft	
According to customer requirements for packaging packaging				